
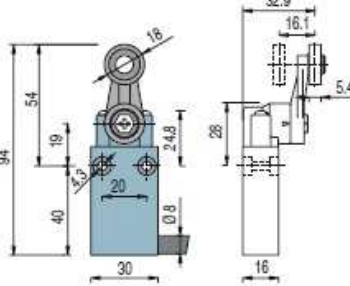


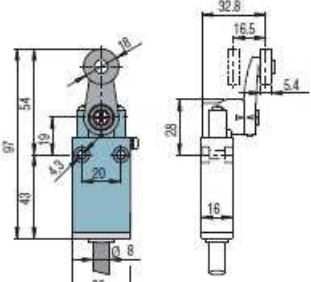
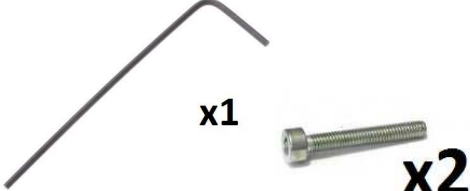

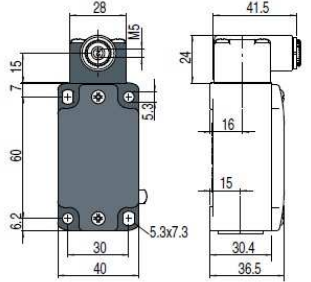


# Micrinterruttori per SNR

 	<p>Code</p> <p><b>MIC2</b></p> <p>PREWIRED POSITION SWITCH</p> <p><b>TECHNICAL FEATURES</b></p> <ul style="list-style-type: none"> <li>-Metal case</li> <li>-Painted with baked epoxy powder</li> <li>-Integrated cable L=2 mt 5 poles</li> <li>-Degree of protection IP67</li> <li>-Operating voltage (Ue): 400 VAC (50 hz)</li> <li>-Operating current (Ie): 3A / 2,5A</li> <li>-Operating temperature: fuse 10A 500V</li> <li>-Protection against short circuit: fuse 10A 500V</li> </ul> <p>Components included in the kit:</p>	<p>Description</p> <p><b>PREWIRED POSITION SWITCH</b></p> <p><b>ATEX ZONA 22 D</b></p> <p><b>TECHNICAL FEATURES</b></p> <ul style="list-style-type: none"> <li>-Metal case</li> <li>-Painted with baked epoxy powder</li> <li>-Integrated cable L=2 mt in polyurethane - 5 poles</li> <li>-Degree of protection IP67</li> <li>-Operating voltage (Ue): 400 VAC (50 hz)</li> <li>-Operating current (Ie): 3A / 2,5A</li> <li>-Protection against short circuits: fuse 10A 500V</li> <li>-Operating temperature: from -20°C to +60°C</li> </ul> <p>Components included in the kit:</p> 
 	<p>Code</p> <p><b>MIC2Q</b></p> <p>PREWIRED POSITION SWITCH</p> <p><b>ATEX ZONA 22 D</b></p> <p><b>TECHNICAL FEATURES</b></p> <ul style="list-style-type: none"> <li>-Metal case</li> <li>-Painted with baked epoxy powder</li> <li>-Integrated cable L=2 mt in polyurethane - 5 poles</li> <li>-Degree of protection IP67</li> <li>-Operating voltage (Ue): 400 VAC (50 hz)</li> <li>-Operating current (Ie): 3A / 2,5A</li> <li>-Protection against short circuits: fuse 10A 500V</li> <li>-Operating temperature: from -20°C to +60°C</li> </ul> <p>Components included in the kit:</p>	<p>Description</p> <p><b>PREWIRED POSITION SWITCH</b></p> <p><b>ATEX ZONA 22 D</b></p> <p><b>TECHNICAL FEATURES</b></p> <ul style="list-style-type: none"> <li>-Metal case</li> <li>-Painted with baked epoxy powder</li> <li>-Integrated cable L=2 mt in polyurethane - 5 poles</li> <li>-Degree of protection IP67</li> <li>-Operating voltage (Ue): 400 VAC (50 hz)</li> <li>-Operating current (Ie): 3A / 2,5A</li> <li>-Protection against short circuits: fuse 10A 500V</li> <li>-Operating temperature: from -20°C to +60°C</li> </ul> <p>Components included in the kit:</p> 
 	<p>Code</p> <p><b>MIC3Q</b></p> <p>PREWIRED POSITION SWITCH</p> <p><b>ATEX ZONA 22 D</b></p> <p><b>TECHNICAL FEATURES</b></p> <ul style="list-style-type: none"> <li>-Metal case</li> <li>-Painted with baked epoxy powder</li> <li>-Integrated cable L=2 mt in polyurethane - 5 poles</li> <li>-Degree of protection IP67</li> <li>-Operating voltage (Ue): 400 VAC (50 hz)</li> <li>-Operating current (Ie): 3A / 2,5A</li> <li>-Protection against short circuits: fuse 10A 500V</li> <li>-Operating temperature: from -20°C to +60°C</li> </ul> <p>Components included in the kit:</p>	<p>Description</p> <p><b>PREWIRED POSITION SWITCH</b></p> <p><b>ATEX ZONA 22 D</b></p> <p><b>TECHNICAL FEATURES</b></p> <ul style="list-style-type: none"> <li>-Metal case</li> <li>-Painted with baked epoxy powder</li> <li>-Integrated cable L=2 mt in polyurethane - 5 poles</li> <li>-Degree of protection IP67</li> <li>-Operating voltage (Ue): 400 VAC (50 hz)</li> <li>-Operating current (Ie): 3A / 2,5A</li> <li>-Protection against short circuits: fuse 10A 500V</li> <li>-Operating temperature: from -20°C to +60°C</li> </ul> <p>Components included in the kit:</p> 